



Hydraulic Power Unit For the Copperloy Edge of Dock Leveler




Whether supplied factory direct or in the aftermarket, any Copperloy Edge of Dock Leveler can be converted from a mechanical unit to a hydraulic powered unit in little time.

FEATURES:

- The hydraulic pump, motor and cylinder are housed on a single bracket for easy wall mount installation.
- **In the event of a power failure**, the cylinder arm can be disconnected from the ramp plate bracket allowing the unit to then be mechanically operated.
- Lift assist extension springs remain on our hydraulic edge of dock levelers.
- All Copperloy EOD's are supplied with an activation handle, as it also doubles as a safety maintenance strut.

Available Voltage:

- 115/230 volt, single phase (standard)
- 230/460 volt, three phase (available)

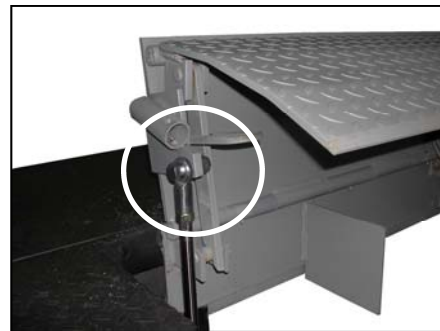

Cylinder connection to ramp plate



Wall-Mount
Toggle Switch
Control Box