



by JH INDUSTRIES, INC.

1981 EAST AURORA RD.
TWINSBURG, OH 44087

PH: 330-963-4105 • 800-321-4968

www.copperloy.com

MOBILE YARD RAMP

RAMP UP YOUR PRODUCTION



The mobile yard ramp provides ground level access to trucks, railcars or buildings. The ramp will create a loading facility instantly, without new construction. Maximum capacities up to 35,000 lbs. and certain models in stock and ready to ship next day.

RAMP FEATURES:



HYDRAULIC HAND PUMP- The pump quickly adjusts top end of the ramp with bed of the vehicle or loading dock. The pump is on the outside of the ramp which allows easy maintenance. The handle is stored out of the way.




SINGLE CYLINDER- With a single cylinder design the ramp raises and lowers evenly every time. The single cylinder also requires fewer pumps to raise the ramp to its desired position.



POSITIONING SLEEVE (Standard on all steel models)– Provides a durable means of positioning the ramp into place. The design allows 180 degrees of motion to maneuver those tight spaces. Not intended for long distance towing.



15" LIP– Deep overlap of frame at high end is assurance that the ramp rests firmly on the carrier body or dock floor. Eight-foot-long safety chains and hooks are provided for added security and increase safety.

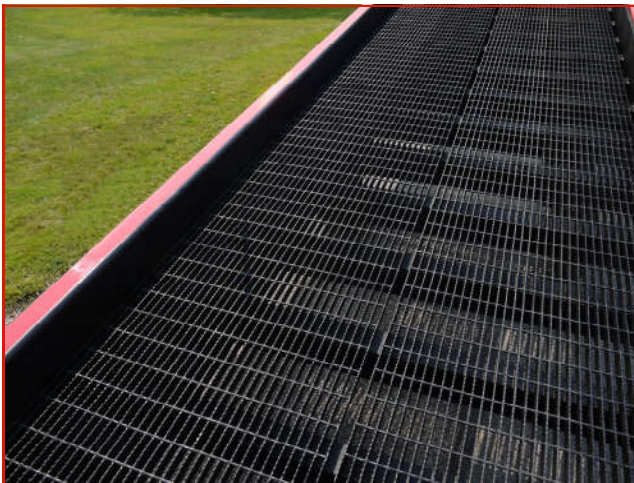

DECK GRATING AND CURB – Grating is constructed of electro-forged serrated steel for superior strength and traction. Seven inch curb height prevents accidental vehicle runoff.



SOLID/PNEUMATIC TIRES (Standard on all ramps) – Premium 18" tires, ideal for use in all applications. The solid tires are maintenance free and can handle irregular or bumpy surfaces.



8-FOOT LEVEL OFF SECTION – Provides easy access to trucks and loading docks alike. The level of section provides more room to get those hard to reach loads on the back of the truck.



LOW END PLATE – 36" long. Approach plate is beveled from the underside to provide a smooth ground-level entry, eliminating jolts and bumps when forklifts travel on and off the ramp.